
FUNCTION




Roller shutters

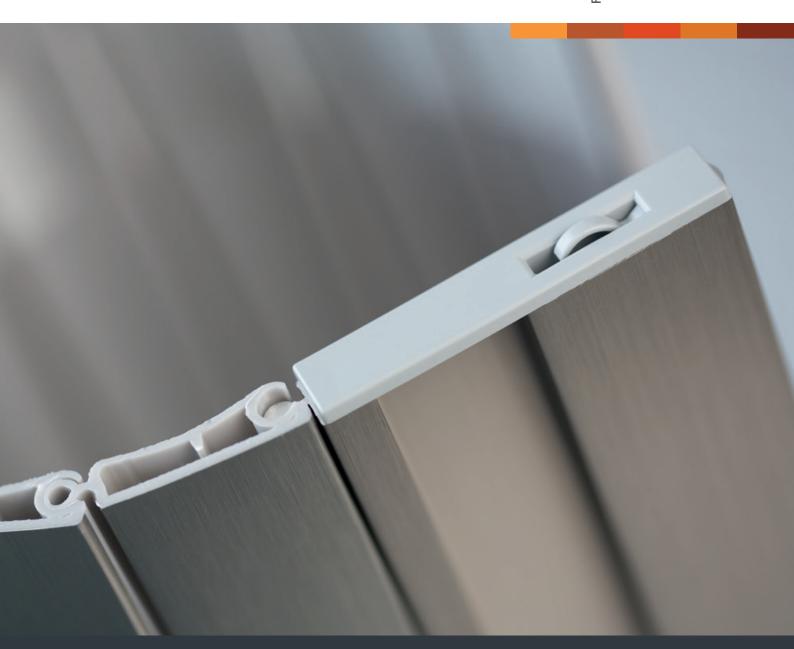

smart plus

Aluminium

- Straight-lined and striking: extruded slats made of solid aluminium provide the basis for its concise design.
- > Classic and timeless: slat height 25 mm.
- > Absolutely silent: flexible plastic profiles interconnect the single slats free from backlash.
- High-quality components: end caps made of low-friction polyamide ensure the comfortable operating features of the roller shutter.

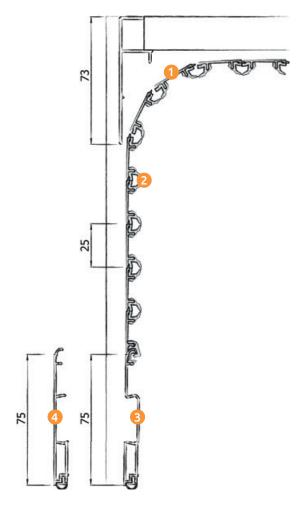



Finish

- > Anodised aluminium (E6/C0)
- > Aluminium with stainless steel effect (E2/ES)

Features

- > Various lock options
- > Electrical drive (further information in our brochure "smart motion")
- 1 Aluminium slat, construction size 25 mm
- 2 Patented connecting profile made of plastic for a silent operation
- 3 Handle profile with integrated end stop damping
- 4 End profile for handle mounting with integrated end stop damping

Suitable for the following guiding modes:




KS 40 - series

ABS plastic with decorative finish

- Absolutely reliable: the robust interlinkage of the slats stands for longevity even under tough operating conditions.
- > ABS material: recyclable with maximum bending stiffness.
- Maximum stability: bottom profiles made of real aluminium.
- > Timeless elegance: slat height 40 mm in two surface quality levels.

KS 40 FSlats wrapped with real aluminiumKS 40 LPaintable slats

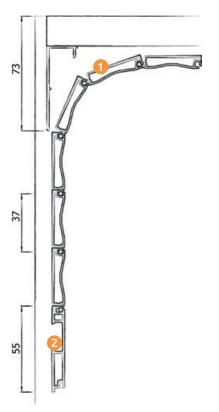



Finish

KS 40 F Anodised aluminium (E6/C0) Aluminium with stainless steel effect (E2/ES)KS 40 L Plain-coloured, paintable

Features

- Various lock options
- > Electrical drive
- (further information in our brochure "smart motion")
- 1 ABS slat, construction size 40 mm
- 2 Handle profile made of real aluminium with integrated end stop damping

Suitable for the following guiding modes:

